


# 3x9 Cylindrical Crystal

## SPECIFICATION

Frequency Range	3.579 to 60.00MHz
Frequency Tolerance	± 50 PPM ( Standard )
Frequency Stability	± 100 PPM ( Standard )
Operating Temperature Range	0EC to 70EC ( Standard )
Load Capacitance ( CL )	12pF to 50pF & Series
Shunt Capacitance	7pF Maximum
Drive Level	1mWatt Maximum
Aging	±5 PPM per year Maximum

Dimensions in In (mm)

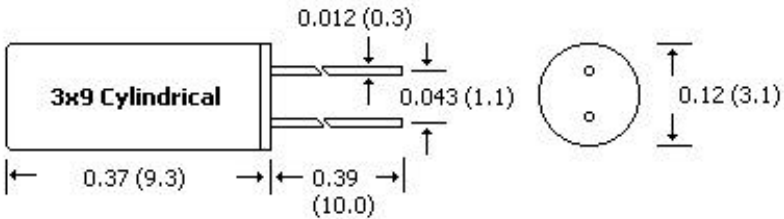

### 3x9 Cylindrical Crystal Part Number Break Down

