


# 5x3 CRYSTAL MINIATURE SMD

## MICROPROCESSOR CRYSTAL

### SPECIFICATION

|                             |                            |
|-----------------------------|----------------------------|
| Frequency Range             | 10 to 45 MHz (Fundamental) |
| Frequency Tolerance         | ± 50 PPM (Standard)        |
| Frequency Stability         | ± 50 PPM ( Standard )      |
| Operating Temperature Range | 0EC to 70EC ( Standard )   |
| Load Capacitance ( CL )     | 12pF to 50pF & Series      |
| Shunt Capacitance           | 7pF Maximum                |
| Drive Level                 | 100uWatt Maximum           |
| Aging                       | ±3 PPM per year Maximum    |

Dimensions in mm

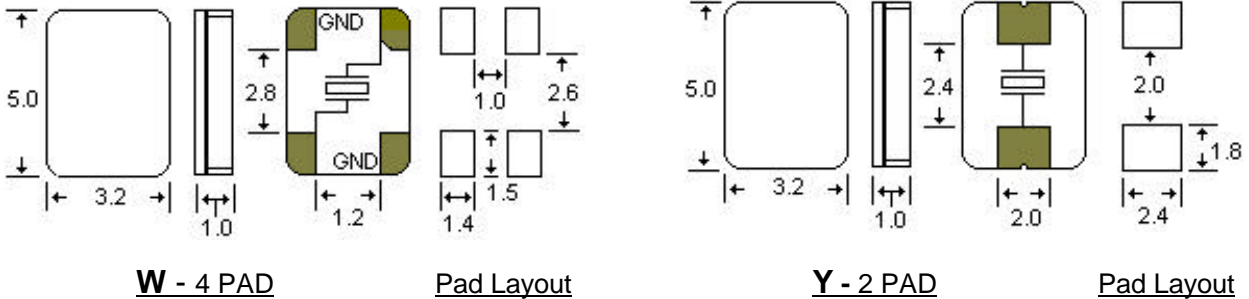

### 5 x 3 MINI. SMD CRYSTAL Part Number Break Down

